


900588

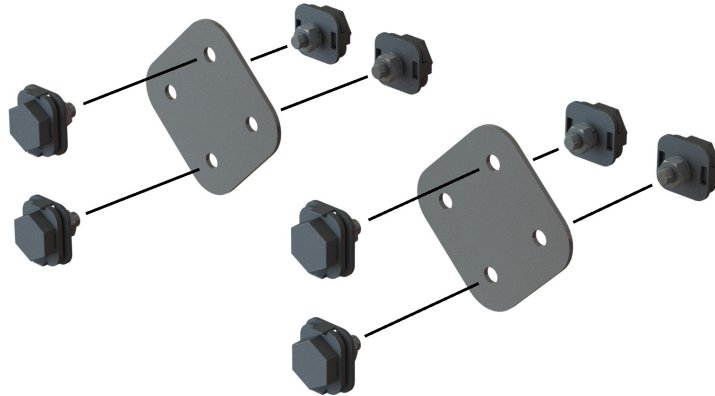

SPECIFICATIONS

General	PIM Shield Rail Cross Kits provide a low passive intermodulation method to join PIM Shield Rails at 90-degrees to each other in high risk PIM zones. Each kit contains 2 stainless steel joining plates and 8 stainless steel channel runners.
System PIM performance (when installed at next higher assembly)	IM3 <-100 dBm when tested in accordance with IEC 62037-8, near field test, 2x 20W test tones, while subjected to dynamic stimulus. To achieve specified PIM performance, torque M10 hardware to 15 FT-LB (ConcealFab tool 900412)
Joining plate material	Stainless Steel
Channel runners (Ref. 900589-10)	UV stable, glass filled Nylon M10-1.5 x 30 mm, stainless steel
Operating temperature	-40°C to +70°C
Case dimensions	6.5-inch x 6.5-inch x 7-inch
Case weight	11.3 lb.
Qty per case	5 kits