


Meets the requirements of ASTM D 6164, Type I, Grade G

Features and Components

PIM Shield™ Technology: Engineered to reduce passive intermodulation (PIM) interference on buildings supporting mobile communications infrastructure.

Reflective Roofing Granules: Specifically engineered for high reflectivity, durability and optimal embedment in the SBS modified bitumen sheet.

High-Quality SBS Rubber and Asphalt Blend: Lends elasticity and flexibility to the sheet and contains fire-retardant additives. The thicker JM SBS coating provides more waterproofing value.

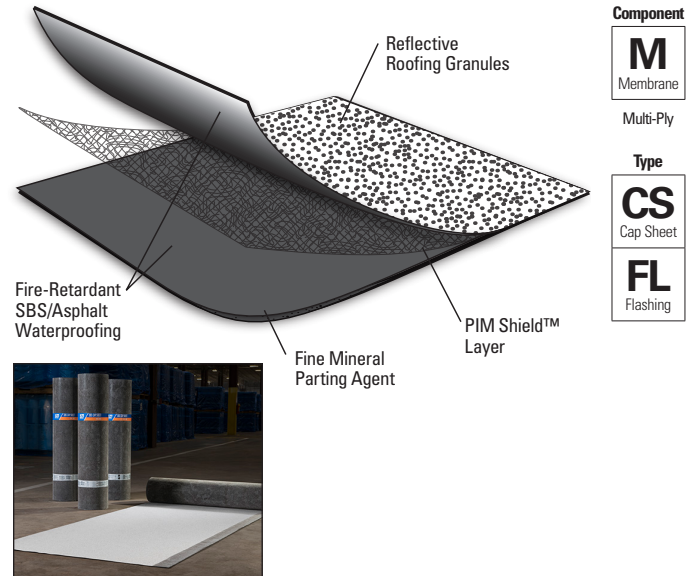

Component
M Membrane
Multi-Ply
Type
CS Cap Sheet
FL Flashing

Color: Bright White only

System Compatibility This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

Multi-Ply	BUR		APP		SBS			
	HA	CA	CA	HW	HA	CA	HW	SA
Compatible with the selected Multi-Ply systems above								

Single Ply	TPO		PVC		EPDM	
	MF	FA	MF	FA	MF	BA
Do not use with Single Ply systems						

Key: HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened FA = Fully Adhered BA = Ballasted

Energy and the Environment

CRRC®	Test	Initial	3-Year Aged**
		Reflectivity (ASTM C 1549)	0.72
	Emissivity (ASTM C 1371)	0.89	0.89
Rated Product ID: 0662-0042a Licensed Manufacturer ID: 0662 Classification: Production Line			
This product meets the requirements of California Title 24, Part 6			
LEED®	Solar Reflectance Index (SRI) - E 1980	88	81
	Recycled Content	0%	

* Cool Roof Rating Council ratings are determined for a fixed set of conditions, and may not be appropriate for determining seasonal energy performance. The actual effect of solar reflectance and thermal emittance on building construction may vary.

Manufacturer of product stipulates that these ratings were determined in accordance with the applicable Cool Roof Rating normal procedures.

** Tested in accordance with Rapid Ratings D7897.

Peak Advantage® Guarantee Information

Systems	Guarantee Term
When used in most 2-5 ply JM SBS systems.*	Up to 30 years

*Contact JM Technical Services for specific system requirements for guarantee lengths.

Codes and Approvals



Refer to the Safety Data Sheet and product label prior to using this product. The Safety Data Sheet is available by calling (800) 922-5922 or on the Web at www.jm.com/roofing.

Installation/Application



- May be installed in Type IV asphalt or in an approved JM adhesive
- Laps may be installed using heat-welding techniques
- Refer to JM SBS modified bitumen specifications and detail drawings for application and slope information

Packaging and Dimensions

Roll Coverage*	95.8 ft ² (8.9 m ²)
Roll Length	32' 10" (10.01 m)
Roll Width	39 3/8" (1 m)
Roll Weight	96 lb (43.5 kg)
Rolls per Pallet	20
Pallet Weight	1,975 lb (895.8 kg)
Pallets per Truck**	20

*Assumes a 4" side lap **Assumes 48' flatbed truck.

Meets the requirements of ASTM D 6164, Type I, Grade G

Tested Physical Properties

Physical Properties		ASTM Test Method	Standard for ASTM D 6164, Type I, Grade G (Min.)	DynaLastic 180 FR CR G	
				MD*	XMD**
Strength	Tensile Tear	D 5147	55 lbf (245 N)	125 lbf (556 N)	90 lbf (400 N)
	Peak Load at 0°F (-18°C)	D 5147	70 lbf/in (12 kN/m)	110 lbf/in (19.3 kN/m)	90 lbf/in (15.8 kN/m)
	Peak Load at 73.4°F (23°C)	D 5147	50 lbf/in (8.8 kN/m)	80 lbf/in (14.0 kN/m)	60 lbf/in (10.5 kN/m)
Longevity	Low Temp. Flexibility	Unconditioned	D 5147	0°F (-18°C)	-20°F (-29°C)
		90-Day Heat Conditioned	D 5147	0°F (-18°C)	-20°F (-29°C)
	Compound Stability	D 5147	215°F (102°C)	250°F (121°C)	
	Granule Loss	D 4977	2 g (0.07 oz)	0.7 g (0.02 oz)	
	Thickness	D 5147	130 mil (3.3 mm)	157 mil (4.0 mm)	
	Selvage Edge Thickness	D 5147	N/A	119 mil (3.0 mm)	
	Elongation at Peak Load at 0°F (-18°C)	D 5147	20%	35%	40%
	Elongation at Peak Load at 73.4°F (23°C)	D 5147	35%	55%	60%
	Ultimate Elongation at 73.4°F (23°C)	D 5147	38%	70%	80%
Aged Performance	90-Day Heat-Conditioned Peak Load at 0°F (-18°C)	D 5147	70 lbf/in (12 kN/m)	110 lbf/in (19.3 kN/m)	90 lbf/in (15.8 kN/m)
	90-Day Heat-Conditioned Elongation at Peak Load at 0°F (-18°C)	D 5147	20%	25%	25%
	90-Day Heat-Conditioned Peak Load at 73.4°F (23°C)	D 5147	50 lbf/in (8.8 kN/m)	85 lbf/in (14.9 kN/m)	65 lbf/in (11.4 kN/m)
	90-Day Heat-Conditioned Elongation at Peak Load at 73.4°F (23°C)	D 5147	35%	35%	45%
	90-Day Heat-Conditioned Ultimate Elongation at 73.4°F (23°C)	D 5147	38%	45%	45%
Installation	Dimensional Stability	D 5147	1.0%	0.2%	0.1%
	Net Mass per Unit Area	D 146	75 lb/100 ft ² (34 kg/9.29 m ²)	90 lb/100 ft ² (41 kg/9.29 m ²)	
	Roll Weight	D 146	N/A	96 lb (43.5 kg)	

*MD = Machine Direction

**XMD = Cross-Machine Direction

Note: Material tested in accordance with ASTM D 5147 Standard Test Methods for Sampling and Testing Modified Bituminous Sheet Materials.

Tested Electrical Properties

Parameter	Specification	Test Conditions
Operating Frequency	300 MHz - 2700 MHz	Frequency range over which the 1-way attenuation of the membrane is >10 dB
Radiated Passive Intermodulation, IM3	<-100 dBm (<-143 dBc)	Source antenna: 8.5 dBi +/- 1.5 dB gain Test specimen separation: 5 FT (1.5m) Test power: 2x 20W (+43 dBm)