


**USE TO SECURE GALVANIZED THREADED ROD KITS TO PIM SHIELD RAIL.  
USE 900360-10 TO SECURE STAINLESS STEEL THREADED RODS TO RAIL.**

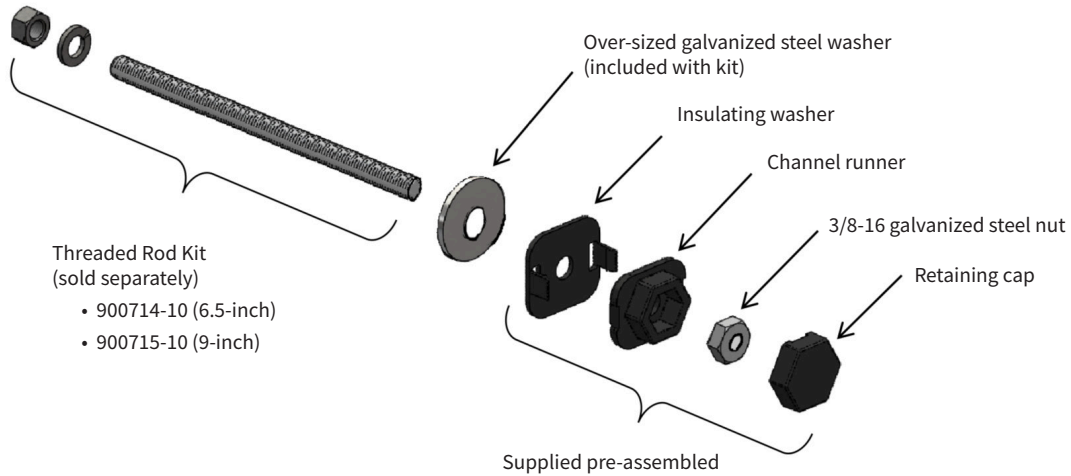

## SPECIFICATIONS

For patents see [www.cf-pat.com](http://www.cf-pat.com)

<b>General</b>	PIM Shield Channel Runner Kit provides a low passive intermodulation method to secure galvanized Threaded Rod Kits (sold separately) to a PIM Shield Rail in the high-risk PIM zone. The channel runner assembly slides inside the rail extrusion and provides insulation between the aluminum rail and the galvanized mounting hardware.
<b>Internal hardware</b>	3/8-16 galvanized steel nut
<b>System PIM performance (when tested at next higher assembly)</b>	IM3 <-100 dBm when tested in accordance with proposed IEC 62037-8, near field test, 2x 20W test tones, while subjected to dynamic stimulus. To achieve specified PIM performance, torque all 3/8-inch hardware to 10 FT-LB. (ConcealFab tool 900053)
<b>Channel runner material</b>	UV stable, glass filled Nylon
<b>Operating temperature</b>	-40°C to +70°C
<b>Case dimensions</b>	8.5-inch x 8.5-inch x 9-inch
<b>Case weight</b>	14.2 lbs.
<b>Qty per case</b>	10 kits of 10